



Frequency Amplifier Marshall Kilburn Battery Replacement

Replace Kilburn battery

Written By: Edith-Marie Roper




Step 1 — Battery



- Lay the amp on its side. You should see a small door kept closed with two screws. Turn the amp so the small door faces you.

Step 2

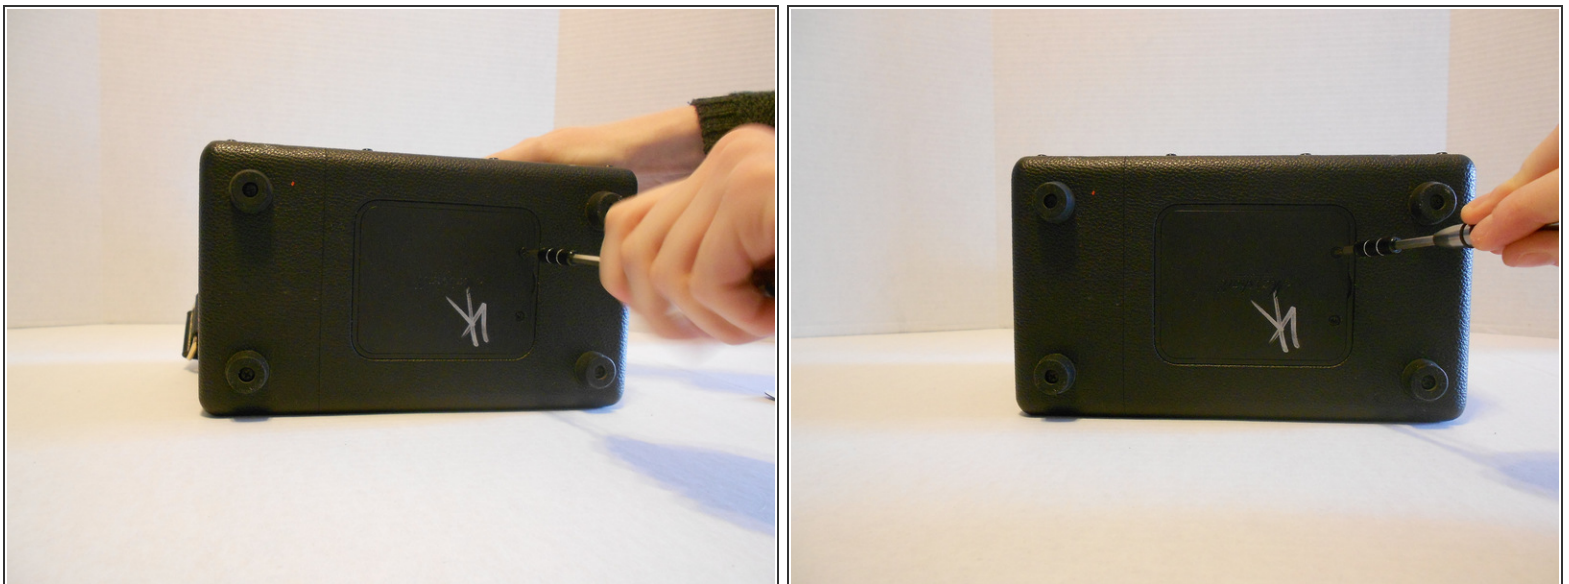


- Using a screwdriver, remove the two screws from the door. Then, using a slot head screwdriver, remove the door.

Step 3



- Pull the yellow tab to remove the battery from the amp.

Step 4

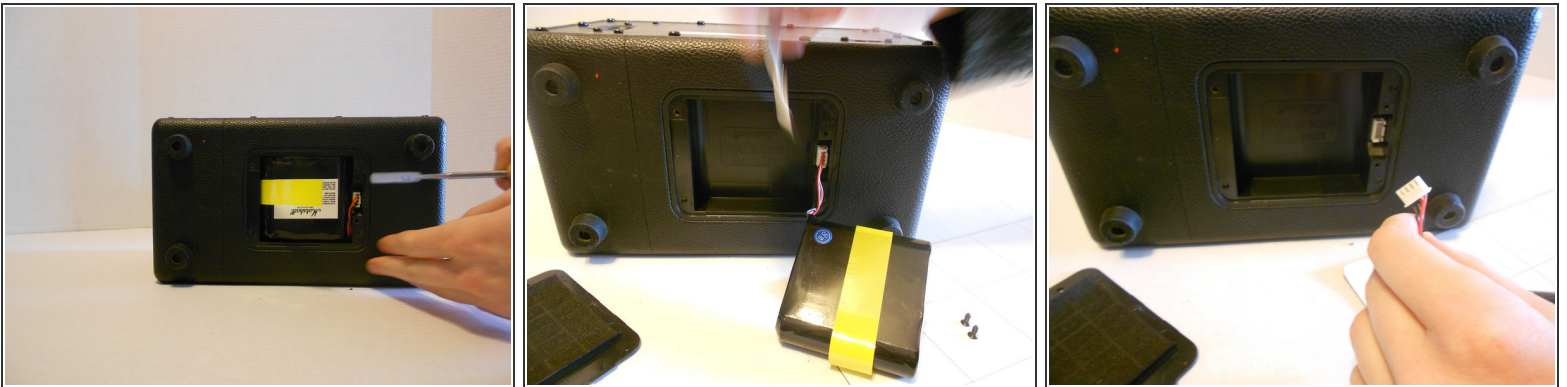

- Carefully disconnect the battery cord from its socket.

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2017-06-25 08:06:50 AM.